

1U AC Input ATX Type


ACE-A627A

270 W 1U Type ATX Power Supply



Input Type	90-264 VAC Full Range					
Output Voltage	+3.3 V	+5 V	+12 V	+12 V 2	-12 V	+5 Vsb
	16 A (0.5 A min.)	18 A (0.5 A min.)	16 A (1 A min.)	10 A (1 A min.)	0.8 A (0 A min.)	2.5 A (0 A min.)
Efficiency	80%					
Temperature	Operating : 0°C ~ 50°C, Storage : -20°C ~ 80°C					
MTBF(hrs)	100,000 hr					
Output Connector	20-pin ATX, 4-pin 12 V, FDD and 3 x HDD					
Dimensions	150 x 81.5 x 40.5 (mm)					

Dimensions

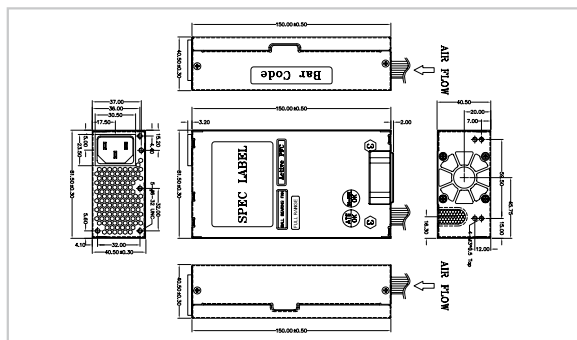

Ordering Information

Part No.	Description
ACE-A627A-RS-R11	270W AC-DC 1U flex ATX Power Supply, with PFC/ErP, meet 80 plus


ACE-A622A

220W 1U Type ATX Power Supply



Input Type	90-264 VAC Full Range					
Output Voltage	+3.3 V	+5 V	+12 V	+12 V 2	-12 V	+5 Vsb
	14 A (0.5 A min.)	16 A (0.5 A min.)	16 A (1 A min.)	10 A (1 A min.)	0.8 A (0 A min.)	2.5 A (0 A min.)
Efficiency	80%					
Temperature	Operating : 0°C~ 50°C, Storage : -20°C~ 80°C					
MTBF(hrs)	100,000 hr					
Output Connector	20-pin ATX, 4-pin 12 V, 3 x HDD and 1 x FDD					
Dimensions	150 x 81.5 x 40.5 (mm)					

Dimensions

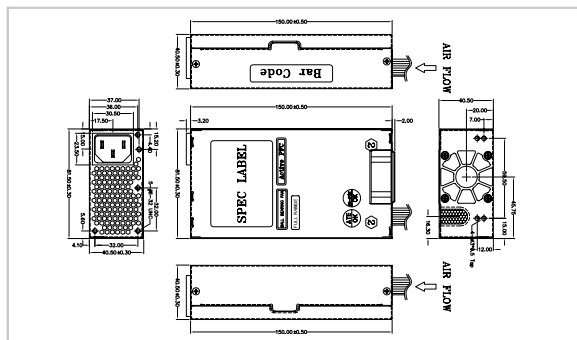

Ordering Information

Part No.	Description
ACE-A622A-RS-R11	220W AC-DC 1U flex ATX Power Supply, with PFC/ErP, meet 80 plus


ACE-720APM

200W AC-DC 1U ATX Power Supply



Input Type	85 ~ 264 VAC Full Range					
Output Voltage	+3.3 V	+5 V	+12 V	-5 V	-12 V	+5 Vsb
		20 A (2 A min)	9 A		0.5 A	0.5 A
Efficiency	82%					
Temperature	Operating : 0°C~ 70°C (50°C~ 70°C derating curve) Storage : -20°C~ 85°C					
MTBF(hrs)	100,000					
Output Connector	+5Vsb & PS on cable					
Dimensions	198 x 97 x 39 (mm)					

Dimensions

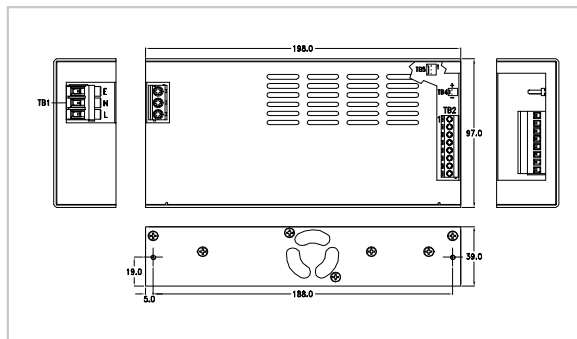

Ordering Information

Part No.	Description
ACE-720APM-RS	200W AC-DC 1U ATX Power Supply with PFC, meets Medical standard