


# ACE-890A/AP

86 W AC-DC Open Frame AT Power Supply

**86W**



**PFC**

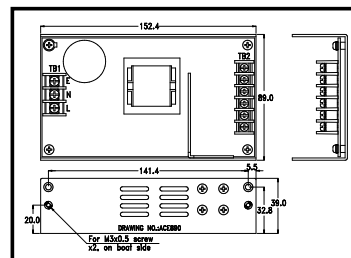


Input Type	85 ~ 264 VAC Full Range (ACE-890A) 90 ~ 264 VAC Full Range (ACE-890AP-R20)				
Output Voltage	+5 V	+12 V	-5 V	-12 V	+24 V
ACE-890A	10 A	2.5 A		0.5 A	
ACE-890AP	10 A (3A min)	2.5 A (0.25A min)		0.5 A	
Efficiency	70 %				
Temperature	ACE-890A : 0 °C~ 50°C (Operating), -20 ~ 85°C(Storage) ACE-890AP : 0 °C~ 50°C (Operating), -30 °C~ 70°C(Storage)				
MTBF(hrs)	268,000(ACE-890A) , 300,000(ACE-890AP)				
Output Connector	Optional Cable				
Dimensions	152.4 x 89 x 39 mm				


## Ordering Information

Part No.	Description
ACE-890A-RS	86W AC-DC Open Frame AT Power Supply
ACE-890AP-R20-RS	86W AC-DC Open Frame AT Power Supply, with PFC


### Optional 1 AC Input Solution




### Optional 2 Embedded Solution



### Optional 3 ATX Backplane Solution



### Optional 4 AT P8P9 Backplane Solution




# ACE-870A/AP

70 W AC-DC Open Frame AT Power Supply

**70W**



**PFC**

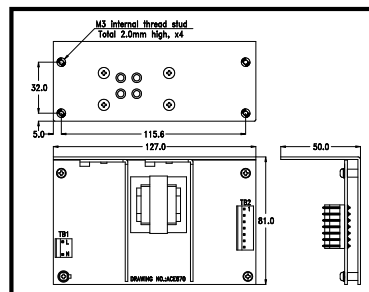


Input Type	85 ~ 264VAC Full Range				
Output Voltage	+5V	+12V	-5V	-12V	+24V
	7A	2.5A	0.3A	0.3A	
Efficiency	70%				
Temperature	0 ~ 50 °C (Operating), -20 ~ 85 °C(Storage)				
MTBF(hrs)	296,000(ACE-870A) , 238,000(ACE-870AP)				
Output Connector	Optional Cable				
Dimensions	127 x 81 x 50 mm				


## Ordering Information

Part No.	Description
ACE-870A-RS	70W AC-DC Open Frame AT Power Supply
ACE-870AP-RS	70W AC-DC Open Frame AT Power Supply, with PFC


### Optional 1 AC Input Solution



### Optional 2 Embedded Solution



### Optional 3 ATX Backplane Solution



### Optional 4 AT P8P9 Backplane Solution

