


Magnetic Card Reader



P/N	Description
AFLP-12BMSR-U	Magnetic card reader for AFL-12B-LXPOS
AFLP-17AMSR-U	Magnetic card reader, for AFL-15A-LXPOS
EPP-16MSR-U	Magnetic card reader for EP-162/165 POS
EPP-26MSR-U	Magnetic card reader for EP-265/267 POS

- 90mm Magnetic Strip Reader
- Read track: ISO 1,2 , 3 (IATA, ABA, THRIFT.MINTS)
- Card Standard: ANSI, ISO, ABA
- Power Requirement: +5VDC +/- 5%
- Reading Indicator: Beeper
- Operating Temperature: 0 - 40 degree C
- Relative Humidity: 20% to 85% (Non-Condensing)
- Cable Straight 5ft.
- Interface: USB


Smart Card Reader



P/N	Description
AFLP-12BMSI-U	Smart card reader for AFL-12B-LXPOS
AFLP-17AMSI-U	Smart card reader for AFL-15A-LXPOS
EPP-16MSI-U	Smart card reader for EP-162/165 POS
EPP-26MSI-U	Smart card reader for EP-265/267 POS

- Magnetic Card: ISO 7811, AAMVA, DMV, JIS-II
- Smart Card: ISO 7816, EMV
- Power Requirement: +5VDC +/- 5%
- Reading Indicator: Beeper
- Operating Temperature: -10 - 55 degree C
- Relative Humidity: 10% to 90% (Non-Condensing)
- Cable Straight 5ft.
- Interface: USB

Barcode Reader

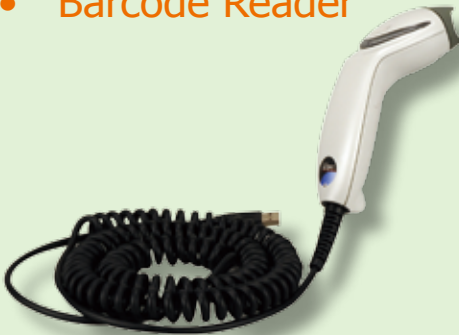

P/N	Description
AFLP-BRW01-U	Single-line, hand-held laser scanner, white color
AFLP-BRB01-U	Single-line, hand-held laser scanner, black color

Scan Performance	Depth of Scan Field	0 -140 mm (0"-5.5") for 0.33mm (13mil) bar codes
	Width of Scan Field	49mm (1.9") @ face; 195mm (7.7") @140mm (5.5")
	Scan Speed	72 scan lines per second
	Scan Pattern	Single scan line
	Minimum Bar Width	0.102 mm (4 mil)
	Print Contrast	35% minimum reflectance difference
	Roll, Pitch, Yaw	42°, 68°, 52°
Mechanical	Length	169 mm (6.7")
	Weight (w/o Cable)	97g (3.41 oz)
	Termination	10 pin modular RJ-45
	Cable	Standard 1.5m straight; optional 2.7m coiled
Electrical	Input Voltage	+5V DC +0.25V
	Power	675mW
	Operating Current	135mA@ 5VDC
	System Interface	USB

Cash Drawer



P/N	Description
AFLP-CW01-24V	Cash Drawer, 24V DC input, 6-pin RJ-12 phone jack, white color
AFLP-CB01-24V	Cash Drawer, 24V DC input, 6-pin RJ-12 phone jack, black color

Drawer	Heavy duty metal drawer with keylock
Casing	Robust metal construction
Front Panel	Robust metal construction
Lock	3 Position
Bill Tray	Separate coin tray removable from the bill tray. Adjustable dividers for four or five compartments
Coin Tray	Separate coin tray removable from the bill tray. Adjustable dividers for up to eight compartments
Slip Deposit Slot	Front access slot for check, credit card receipt, or any paper
I/O interface	6-pin RJ-12 phone jack for EPSON printer compatible
Solenoid	24V for 6 pin RJ-12 phone jack interface
Dimensions (WxLxH)	410 x 415 x 100 mm
Net Weight	6.8 KGs